


006 Ductile Iron Balancing Valves

Orifice Type (오리피스 내장형) DN65~DN300-Flanged Type

Fixed Integral Orifice Double Regulating Valve (FODRV)

DM941 PN16

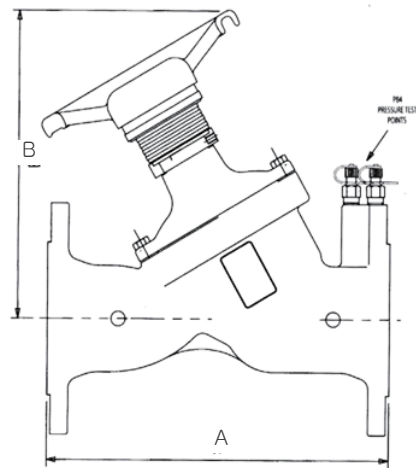

형식

형식	DM941 / DA941
적용 유체	물
적용 압력	16kgf/cm ²
내압 시험	24kgf/cm ²
적용 온도	-10℃~120℃
접속 방법	BS EN 1092-2 PN16

재질

Part	Material
Body	Ductile Iron
Bonnet	Ductile Iron
Bonnet Gasket	Non-asbestos
Disc (All sizes)	EPDM Coated Cast Iron
Disc Bush	Bronze
Stem	410 SS
Gland (65 to 150mm)	Brass
Gland (200 to 300mm)	Cast Iron
Gland Nut	Brass
Packing	Non-asbestos
Seat Ring	Bronze

Size & 총량

DN	Face-to-face A mm	Centre-to-top B mm	Weight Kg
65	290	262	16.3
80	310	267	20.0
100	350	300	28.5
125	400	325	38.0
150	480	340	51.0
200	600	525	124.0
250	730	575	194.0
300	850	645	254.0